

P 199/00097

199/00097




STATE OF ISRAEL

REC'D 17 MAR 1999	
WIPO	PCT


5
#6/1
6.2.01

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

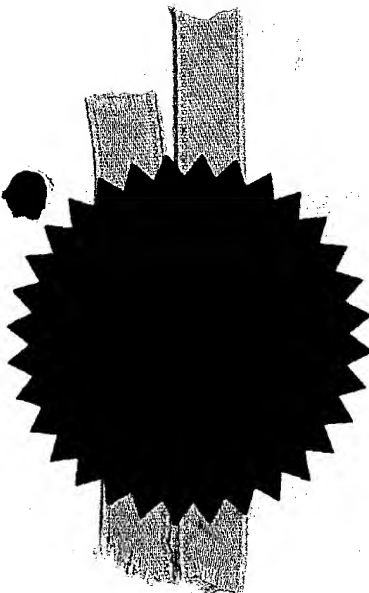

This 23-02-1999 היום

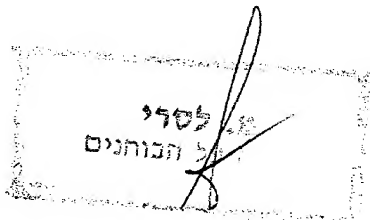

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

רשם הפטנטים
Registrar of Patents

נתאשר

מספר: Number	123468
תאריך: Date	26-02-1998
הוקדם/נדחה Ante/post dated	

ב ק ש ה ל פ ט נ ט
Application for Patent

אני, (שם המבקש, מענו - ולגבי גוף מאוגד - מקום התאגדותו)
I, (Name and address of applicant, and, in case of body corporate, place of incorporation)

YISSUM RESEARCH DEVELOPMENT COMPANY OF THE
HEBREW UNIVERSITY OF JERUSALEM

יישום חברה לפיתוח המחקר של האוניברסיטה
העברית בירושלים
רח' ז'בוטינסקי 46
ירושלים

INVENTORS:NISSIM GARTI
YANA BERKOVICH

ממציאים: ניסים גרתי, דרך החורש 9 ירושלים 97278
יאנה ברקוביץ, שד' הדקל 3206/22
גבעת שרת 99510

ששמה הוא:

הדין

בעל אמצאה מכח

of an invention the title of which is

Owner, by virtue of

(בעברית) שיטות להכנת חלקי חומר בעלי גודל ננסי

(Hebrew)


METHODS FOR THE PREPARATION OF NANOSIZED MATERIAL PARTICLES

(באנגלית)

(English)

hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט.

*בקשה פטנט מוסף - Application of Patent of Addition		*דרישה דין קדימה Priority Claim		
*בקשת חלוקה - Application for Division				
מבקשת פטנט from Application		מדינת האגוד Convention Country		
No. dated	מס' מיום	מספר / סימן Number / Mark	תאריך Date	
*יפוי כח: כללי/מיוחד - בעתיד/עוד יוגש P.O.A.: general/specific - attached/ to be filed later - הוגש בעניין המקום למסירת מסמכים בישראל Address for Service in Israel ה-7596 ד"ר יצחק הס ושותפיו ת.ד. 6451 תל אביב 61063				
Signature of Applicant חתימת המבקש		היום 25 בחודש of This		
For the applicant: DR. YITZHAK HESS & PARTNERS BY: 		שנה 1998 of the year פברואר		
		לשימוש הלשכה For Office Use		

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם בספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומי לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application, the particulars of which are set out above

*Delete whatever is inapplicable - מחק את המיותר *

שיטות להכנת חלקי חומר בעלי גודל ננסי

METHODS FOR THE PREPARATION OF NANOSIZED
MATERIAL PARTICLES

Yissum Research and Development Company
of the Hebrew University of Jerusalem

Inventors: Nissim Garti
Yana Berkovich

The present invention relates to the methods for the preparation of nanosized material particles. ("Nano-materials" in connection with the present invention comprise transition metals and alloys; metal oxides; and ceramic compositions having a small nanosize, i.e. about 1 - 6 nm.) Nanomaterials are prepared from the corresponding precursors i.e. the corresponding metals salts or alkoxides by suitable chemical reactions, e.g. reduction, hydrolysis and exchange processes under mild conditions.

There are known methods to prepare clusters or fine colloids from said nanomaterials which are dispersed in different suitable solutions. Appropriate liquid media enable the production of different preparations, which may be used as thin films on various supports.

There are known several methods for the preparation of ultrathin films of metal particles on solid supports, e.g. ion implantation (M.Che. C.O. Bennet, Adv. Catal. 1989, 36, 55); organometallic chemical vapor deposition (A. Sherman, Chemical Vapor Deposition for Microelectronics, Principles, Technology and Application, Noyes Publications; Park Ridge, N.J. 1987; and N.H. Dryden et. al., Chem. Mater. 1991, 3, 677); metal deposition from colloidal solution (G.Schmid, Chem. Rev. 1992, 92, 1709); reductive metal deposition from aqueous salt solution (I.Coulthard, et. al., Langmuir 1993, 9, 3441.); photodecomposition of metal complexes in thin films (R.Krasnasky et. al. Langmuir, 1991, 7, 2881); and photo-reductive deposition from Pd(II) complexes in solution (K. Kondo et. al., Chem. Lett. 1992, 999) Other technics are based on the film formation of noble metal loaded block copolymers (Y.NgCheongChan et. al., Chem.Mater. 1992, 4, 24; and J.P.Spatz, et al., Adv. Mater. 1995, 7, 731.); on the Langmuir-Blodget (LB) transfer of monolayers or surfactant stabilized metal

colloids (F.S. Meldrum et. al., Langmuir 1994, 10, 2035; and F.S. Meldrum et al., Chem. Mater. 1995, 7, 1112); and on thermal decomposition of LB films of zero valent palladium complexes (E. Maasen et. al., Langmuir 1996, 12, 5601).

5 At present the microelectronic and some related industries, mainly continue to use the vapor deposition method. The "Wet" method, which is a method of film deposition from solutions, provides a good challenge for the industry since it does not require high temperatures and pressures or high vacuum and enables to vary the properties of the nano compositions to a large extent

During the last decade, the number of scientific works devoted to the synthesis of nanomaterials in solutions has significantly increased. Certain practical results were reported. Thus, for example G. Schmid (see above) demonstrated that the pellets which
15 consist of ligand stabilized golden clusters (derived from a liquid) may be regarded as tunneling resonance resistors and, additionally, as cellular automates. The density of electronic switches, compared with common semiconductors increased in another example to a factor of 10^5 - 10^6 . Another paper (T. Yamamoto, in
20 Macromolecular Complexes, Ed. by Eishun Tsuchida, VCH, 1993, 380-395.) informed about the preparation of electrically conducting polymer compositions by using organosols of metal sulfides. The polymer-composite films not only show good electrical conductivity but were also controlled to p- or n-type conductors.

25 The realization of quantum dots, of uniform size and structure opens the door to multiple switches. This enables the manufacture of new generations of computers with extremely high capacities. The manufacture of novel mini-lasers, based on quantisizing particles, will most probably lead to optoelectronic
30 switches, operated simultaneously by photons and electrons.

Nanometal coatings may be effectively used, e.g. as film catalysts (for instance in the processes of electroless metal deposition); and as modifiers of mechanical properties of different materials.

5 However, all said conventional methods are not satisfactory in the preparation of coatings comprising nanomaterial particles, as they are rather complicated, expensive or do not yield the particles having the desired size.

10 It has thus been desirable to find a method which would overcome said disadvantages, i.e. should not be complicated, not be too expensive and yield nanomaterial particles having the desired size.

15 It is well known that water which appears to be a key factor which governs the association of surfactants in different solvents, functions not only as an inert solvent but plays a significant part in the mechanism of chemical processes. (Garti et. al. Coll. & Interface Sci. 178 (1996) p. 60-68). When describing the state of water in relation to any surface a distinction is usually made between "bulk" and "bound" water. It is assumed that "bulk" or free water has physico-chemical properties which are not very different from those of pure water. "Bound" water may be defined by the operational definitions which refer to the water detected by a certain technique.

20 According to the method utilized by Senatra (D. Senatra et. al. Can. J. of Phys. 68 (1990) p. 1041), in which the endothermic scaling mode was applied and the peaks representing various states of water were identified and analyzed, it was shown that "free" water melts at 0°C, "interfacial bound" water melts at -10°C, and non-freezing water which is the most strongly bound part of bound water has no peaks on thermograms up to -100°C.

30 It has been found that the state of the water is strictly

correlated with the size of the particles. Particles which have a diameter of less than 5 nm are synthesized in systems which comprise only strongly bound water (non freezing water according to subzero differential scanning Calorimetry DSC).

5 In developing the method according to the present invention it has been considered:

a. producing the water organic-surfactant organized solutions (complex liquids) comprising nanosized particles in particular having a diameter of 1- 5 nm which are useful for the particle preparation;

b. regulating the water content in such a manner that the whole water will be strongly bound (non-freezing) in the system, thus enabling to provide nano particles which have a diameter of less than 5 nm;

15 c. the regulation of the solution structures which enables the regulation of the morphology of the particles;

d. the variation of the chemical composition and concentration of nano-precursors (and of the complementary reactants), which enables the control of the particle size distributions (PSD) and of the thickness of the protecting shells;

20 e. using different polymers which enable the production of films having different adhesion properties, by the deep coating method; and

f. the control of the viscosity and of the velocity of the solutions which lead to different film thicknesses;

The optimization of the above-mentioned factors (which should operate simultaneously) should lead to the production of the coating having the desired properties.

30 The present invention thus consists in a method for the production of nanomaterial particles (as herein defined) in which:

said nanomaterial particles are synthesized in the solutions of complex liquids containing non-freezing water from suitable precursors, which precursors are selected from suitable surfactants and alkoxides by a suitable chemical reaction under mild conditions; and

preparing from said materials fine colloids dispersed in various polymer solutions.

The nanomaterial particles have advantageously a diameter of 1-5 nm.

The water in the solution is advantageously non-freezing water.

The suitable chemical reaction may be selected, for example, among reduction, hydrolysis and exchange processes.

Mild conditions in connection with the present invention are suitably atmospheric pressure and a temperature range of room temperature to 70°C.

Suitable solutions may be selected among suitable water organic - surfactant solutions; (microemulsions; liquid crystalline media; etc.)

Suitable solvents may be, e.g. selected among suitable hydrocarbons (octane, decane, dodecane); chlorinated hydrocarbons (1,2 - dichloroethane); ethers (ethylether); etc.

The appropriate liquid media enables the preparation of different self assemblies of nanomaterials and subsequently the use of them as thin films on various supports.

Suitable surfactants are, for example,:

Quaternary ammonium salts, e.g. trioctylmethyl ammonium chloride (aliquat 336), dioctyldimethylammonium bromide (DDAB), cetyltrimethylammonium chloride (CTAB), etc.; sodium bis-(2-ethylhexyl)- sulfosuccinate; poly-ethoxyethylene-10-oley ether (Btij

96; etc.

Metal oxide precursors may be, e.g.

alkoxides:

triethoxy silane (TEOS); trimethoxy silane (TMOS); Al, Zr
5 isopropoxides, etc;

Fe, Mg and Al chlorides; Al and Mg acetates; Na and K
orthosilicates; Zr oxychloride; etc. Metal precursors may be, e.g.
transition metal salts of Fe, Co, Ni, Cu, Ru, Rh, Pd, Ir and Pt,
e.g. FeCl_3 , K_2PdCl_4 , K_2PtCl_4 and CuCl_2 .

The polymers may be selected, e.g. from polyethylene oxide
(PEO), polyvinyl chloride (PVC), polyvinyl alcohol (PVA),
polymethyl methacrylate (PMMA), etc.


Suitable reducing agents are, for example, sodium formate;
hydrogen; certain alcohols (methanol, ethanol, isopropylalcohol);
15 etc.

The method according to the present invention can direct the
morphology, dimension and homogeneity of the size distributions of
the small colloids (and clusters) and also their self assembling.

Example 1

20 A Pd colloidal dispersion was prepared from a solution
containing 12% wt of hydrated trioctylmethylammonium chloride
(aliquat 336) which corresponds to water/aliquat molar ratio =
3.06. Sub-zero DSC analysis did not reveal any peak which belongs
to interfacial (-10°C) and free water (0°C) in the precursor
25 solution.

Potassium tetrachloropalladate (K_2PdCl_4) (326mg) was solubilized
in a 5 ml aliquat-dichloroethane-water mixture. Sodium formate
(NaHCO_2) (0.22 gr) was poured onto the mixture under argon. The
reaction was carried out in accordance with the following formula:



The reaction was carried out at 75°C. In the course of the reaction, the orange color gradually changed to a dark brown color. The reaction was stopped after 1 hour and the dichloroethane was evaporated from the reaction mixture. The waxy residue obtained, 5 was washed, in order to remove the inorganic salts, with deionized water and dried at 30 torr and 60°C.

Electron diffraction data revealed a face centered-cubic (fcc) Pd phase, while Transmission Electron Microscopy (TEM) analysis showed round particles having a mean diameter of 1.8 nm.

The nanometal prepared was redispersed in 40 ml of dichloroethane containing 30% of a v/v Polyvinyl alcohol (PVA). The viscosity of the solution was 40 cps.

The surface of a glass plate was thoroughly cleaned with hot water, methyl alcohol and diethyl ether. A coating was prepared by 15 drawing with the velocity of 8 mm/sec. The bright orange transparent film obtained had a magnitude of electrical conductivity $10^{-8} \Omega^{-1}\text{cm}^{-1}$.

Example 2

20 1.25 g of a commercially available nonionic surfactant Brij-96 (poly- ethoxyethylene- 10- oleyl ether $\text{C}_{18}\text{H}_{35}(\text{OCH}_2\text{CH}_2)\text{OH}$ (PEO) was added to a mixture of 4 ml of hexane and 1.18 g of i-butanol. 1 ml of a 0.025M solution of FeCl_2 in 0.01 HCl was then poured on the mixture. The mixture was homogenized by Vortex and it then looked 25 like a homogenous solution. The sub-zero DSC analysis did not reveal any peak which belong to freezing water. After an ageing process at 40°C in the course of 48 hr, TEM and small angle X-ray scattering (SAXS) there were visualized particles having a mean diameter of 3.5 nm and 10% degree of polydispersion. Photoelec- 30 tronic Spectroscopy (XPS) analysis indicated FeOOH formation. The

microemulsion was concentrated by evaporation at 35°C and 60 torr and the wax residue obtained was redispersed in 10 ml of Polyethylene glycol (PEO). The viscosity of the solution was 9.3 cps. A coating was prepared by drawing with the velocity of 12 mm/sec.

5 Corning glass plates were soaked in ethanol solutions in the course of 24 hr rinsed with distilled water under sonication, then immersed in ethanol and dried at 105°C for 8 hr. A film was formed on the glass plate by spreading of the solution. After a film heat treatment at 45°C the film was not cracked or destroyed. Scanning
10 electron microscopy (SEM) of the coating (removed from the support) did not show any growth of the particles.

Example 3

0.5 g of commercially available surfactant didodecylammonium
15 bromide (DDAB) containing 6% of water was added to 7 ml of toluene, and stirred with shaking to form an inverse micellar solution. Thereafter 0.025 g of K_2PtCl_6 and 1.2 ml of tetraethylorthosilicate (TEOS) were added to the solution obtained, which was then stirred until the salt was fully solubilized. Then $NaBH_4$ was poured into
the salt precursor solution with rapid stirring in an argon atmosphere so that the $[BH_4]:[Pt^{4+}]$ relation was 4:1. The solution gradually turned to dark brown. The pH of the solution was adjusted to 6.5 by the addition of an organic buffer in ethanol. The
solution was aged at room temperature during 3 days previous to
25 film formation by deep coating. According to sub-zero DSC data, the system did not contain any freezing water. The viscosity of the solution was 7.2 cps. A coating was prepared by drawing with the velocity of 12 mm/sec.

Glass substrates were cleaned in the same manner as described
30 in Examples 1 and 2. In order to enhance the adhesion of the film

to the glass, cleaned and dried glass supports were immersed in a 0.5% ethanol solution of triaminopropyltriethoxysilane, rinsed with dichloromethane and ethanol and baked in an oven at 120°C for 2 hr. SAXS, TEM, XPS and SEM analyses were indicative of nanosize (3-5 nm) Pt (partially oxidized on the surface) particles embedded in the silica matrix. Low temperature nitrogen adsorption of the separated film dried at 100°C in the course of 3 hr showed 37% film porosity having a mean pore diameter of 35Å. Thermo treatment of the film at 450°C for 1 hr did not change the pore characteristics of the film. Such prepared substrates were suitable in electroless Ni plating. A typical plating solution contained 0.105 mol of L⁻¹ NiSO₄·7H₂O and 0.195mol of L⁻¹ H₂PO₂.

Claims.

1. A method for the production of nanomaterial particles (as herein defined) in which:
said nanomaterial particles are synthesized in the solutions
of complex liquids from suitable precursors, which precursors
are selected from suitable surfactants and alkoxides, by a
suitable chemical reaction under mild conditions;
and preparing from said materials fine colloids dispersed in
various polymer solutions.
2. A method according to Claim 1 wherein the water in the
solution is non freezing water.
3. A method according to Claim 1 or 2, wherein the nanomaterial
particles have a diameter of 1-5 nm.
4. A method according to any of Claims 1 to 3, wherein the mild
conditons are atmospheric pressure and a temperature range of
room temperature to 70°C.
5. A method according to any of Claims 1 to 4, wherein the
chemical reaction is selected among a hydrolysis, reduction
and exchange process.
6. A method according to any of Claims 1 to 5, wherein the
solutions are selected among organized water- organic
surfactants (microemulsions and liquid crystalline media).
7. A method according to any of Claims 1 to 6, wherein the
solvent is selected among suitable hydrocarbons (octane,
decane, dodecane); chlorinated hydrocarbons (1,2 - dichloroet-
hane); and ethers (ethylether).
8. A method according to any of Claims 1 to 7, wherein the
surfactants are selected among trioctylmethyl ammonium
chloride (aliquat 336), dioctyldimethylammonium bromide

(DDAB), cetyltrimethylammonium chloride (CTAB); sodium bis-(2-ethyl-hexyl)-sulfosuccinate; and poly-ethoxyethylene-10-oley ether.

9. A method according to any of Claims 1 to 6, wherein metal
5 oxides and metal precursors are selected among triethoxy silanes (TEOS); trimethoxy silane (TMOS); Al, Zr isopropoxides,;

Fe, Mg and Al chlorides; Al and Mg acetates; Na and K
orthosilicates; Zr oxychloride and transition metal salts of
0 Fe, Co, Ni, Cu, Ru, Rh, Pd, Ir and Pt.

10. A method according to any of Claims 1 to 9, wherein the
polymers are selected among polyethylene oxide (PEO); polyvinyl
chloride (PVC); polyvinyl alcohol (PVA); and polymethyl
methacrylate (PMMA).

15 11. A method according to any of Claims 5 to 10, wherein the
reducing agent is selected among sodium formate; hydrogen; and
certain alcohols (methanol, ethanol, isopropylalcohol).

For the Applicant:

Dr. Yitzhak Hess & Partners

By: 